



HOSHIZAKI

ADVANCE SBU65GT (400V) Blast Chiller/Freezer




PRODUCT SERIES: ADVANCE SBU 65
ITEM NUMBER: 975780542
COUNTRY OF ORIGIN: ITALY

ADVANCE SBU65GT (400V 3N-/50Hz) is an HACCP compliant blast chiller/freezer for 1/1 GN and/or EN 600 x 400mm trays (max of 14). Chilling/freezing capacity of 70/38 kg. It features a control panel with segment display for simple and fast navigation. Use the preset favourite programs or store your customized cycles. Legs are adjustable 105-155 mm.

- Digital control panel with segment display for simple and fast navigation
- Single-point probe for precise core temperature control
- USB port for download of cooling log data
- HACCP alarms. If a power failure occurs or when a temperature limit is exceeded this will activate an audio-visual alarm
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 14
- The internal fan section can be opened for cleaning around and behind the unit
- Defrost drip tray position under the cabinet
- Right hand hinged door
- Reversible door
- Removable magnetic door gasket



1 / 1 GN



600 x 400 EN

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

N/A

WARRANTY PERIOD

3 Years on Parts & Labour - based on country agreement

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R290 / Refrigerant: 0.3 kg / CO2 equivalent: 0.9 kg

CERTIFICATIONS



Energy consumption - Chilling (kWh/kg)	Energy Consumption - Freezing (kWh/kg)
0.08 kWh/kg	0.25 kWh/kg

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com



HOSHIZAKI

ADVANCE SBU65GT (400V)

TECHNICAL SPECIFICATIONS


Cooling system	GN tray size	Maximum number of trays	Temperature range	Power supply	Climate class	Sound level	Ref. capacity (at -25°C)	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
Built-in cooling system	1/1 GN / 400 x 600 mm EN	14	-40/+10°C	400V, 3N-/50 Hz	5 (max. ambient 40°C w/ 40% RH)	64 dB	2,610 W	70 kg	38 kg

Maximum depth of gastro pans, GN/EN	Height from base to first guide	Height from ceiling to top guide	Distance between guide positions, GN/EN	Dimensions internal (W x D x H)
325/400	58 mm	74 mm	530/600	645 mm x 702 mm x 1,080 mm

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Height including legs (minimum)	Height including legs (maximum)	Net weight
880 mm	990 mm	2,180 mm	1.899 m ³	270 kg	800 mm	930.4 mm	1,849 mm	1,954 mm	2,004 mm	245 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

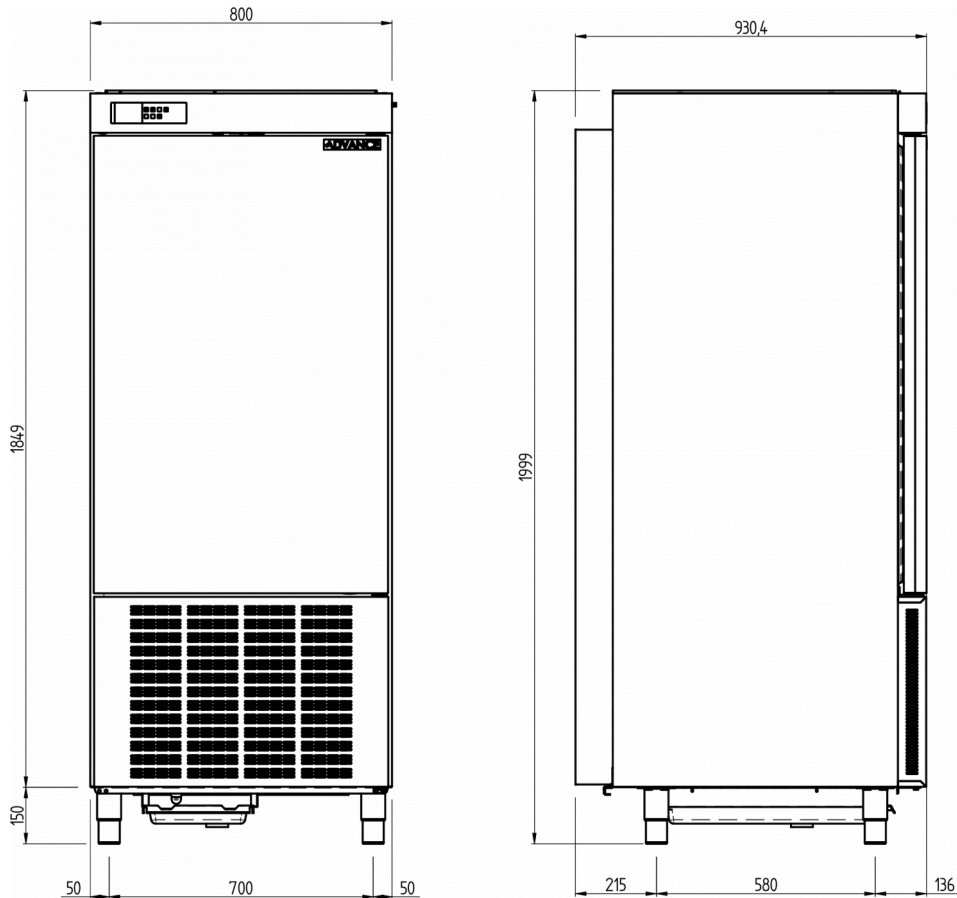

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com