




**ENERG**  
енергия · ενεργεια



**HOSHIZAKI**

PREMIER FL 2 A  
DL DR

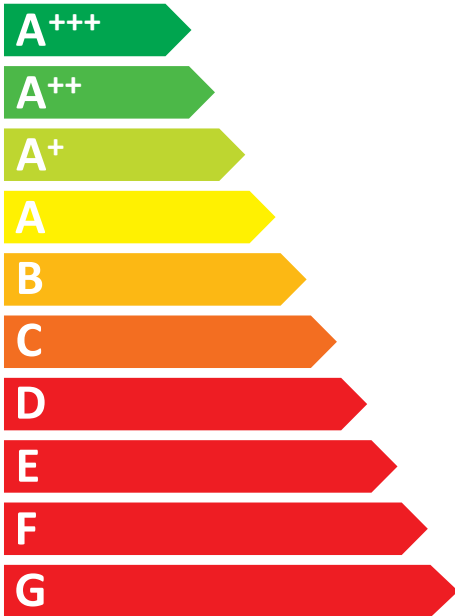

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ  
ENERGIJA · ENERGY · ENERGIE  
ENERGI

**1410**  
kWh/annum



- L



**192**L



**5**

40°C-40%

2015/1094-IV

# PRODUCT FICHE

Supplier / trade mark

**HOSHIZAKI**

Model name:

**PREMIER FL 2 A DL DR**

## Type of model:

|                               |          |
|-------------------------------|----------|
| Chilled operating temperature |          |
| Frozen operating temperature  | <b>X</b> |
| Multi use cabinet             |          |
| Vertical cabinet              |          |
| Counter cabinet               | <b>X</b> |

| Parameter                    | Symbol         | Value                    | Unit   |
|------------------------------|----------------|--------------------------|--------|
| Energy Efficiency Class      | EEC            | <b>C</b>                 |        |
| Energy Efficiency Index      | EEI            | <b>40,26</b>             |        |
| 24 hour Energy Consumption   | E24h           | <b>3,862</b>             | kWh    |
| Annual Energy Consumption    | AEC            | <b>1409,63</b>           | kWh    |
| Net volume for compartment 1 | V <sub>N</sub> | <b>96</b>                | liters |
| Net volume for compartment 2 | V <sub>N</sub> | <b>96</b>                | liters |
| Net volume for compartment 3 | V <sub>N</sub> | -                        | liters |
| Net volume for compartment 4 | V <sub>N</sub> | -                        | liters |
| Refrigerant R290             | -              | <b>0,055</b>             | kg     |
| CO2 Equivalent               | -              |                          | tonnes |
| Climate class                | CC             | <b>5</b><br>40°C, 40 rH% |        |

This appliance is intended for use in ambient temperature up to 40°C